

MPK20 Main Features

LMI-LOAD MOMENT INDICATOR

- ✓ Displays all the information on the boom or any attachment position
- ✓ Displays weight of the load being lifted and the maximum safe working load capacity
- ✓ Prevents overloading and tipping by cutting out when safe limits are approached



USER FRIENDLY

- ✓ Three simple steps to work



Switch on




Confirm



Work


SAFEST CRANE IN THE MARKET

- ✓ In compliance with EN 13000
- ✓ C.E. Certified
- ✓ Overload Data Logging



DIFFERENT ATTACHMENTS

Runner jib

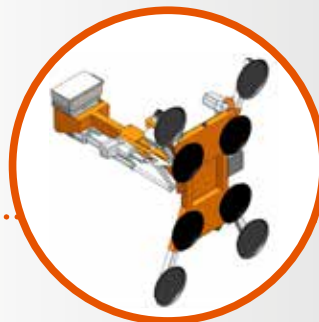

Glass Manipulator

CJEKKO
MPK20



Jekko srl
Via Campardone, 1 - 31014 Colle Umberto (TV) Italy
info@jekko.it - www.jekko-cranes.com

Product Catalog

MPK20



The essential partner for industrial maintenance and glass handling.
Reliable, safe and easy to use: a small crane with great potential.




Technical Information

Dimension	 L x W x H		2660 x 950 x 1950 mm
Crane & Options Weights			Kg
		MPK20	1455
		/	500
		2T-D7	10
		JIB500G	30
		MR800.4	250
MPK20	Battery	1 Battery 24 V 345 Ah	3,0 kW 4,2 Hp
Speed			3.6 km/h
Gradability			10°



Winch&Fall Stages


Main Winch	600 kg 60 m - Ø 7 mm 18 m/min.
------------	--------------------------------------

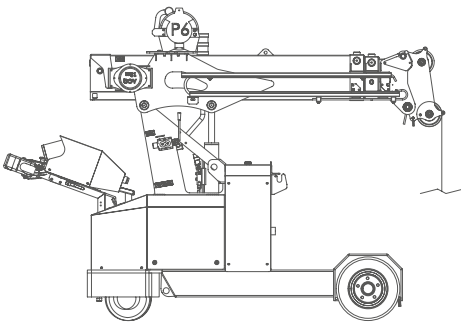


Max. Capacity	Line	Metres
1800 kg	3	-19 m
1200 kg	2	-28 m
600 kg	1	-55 m



Load Chart

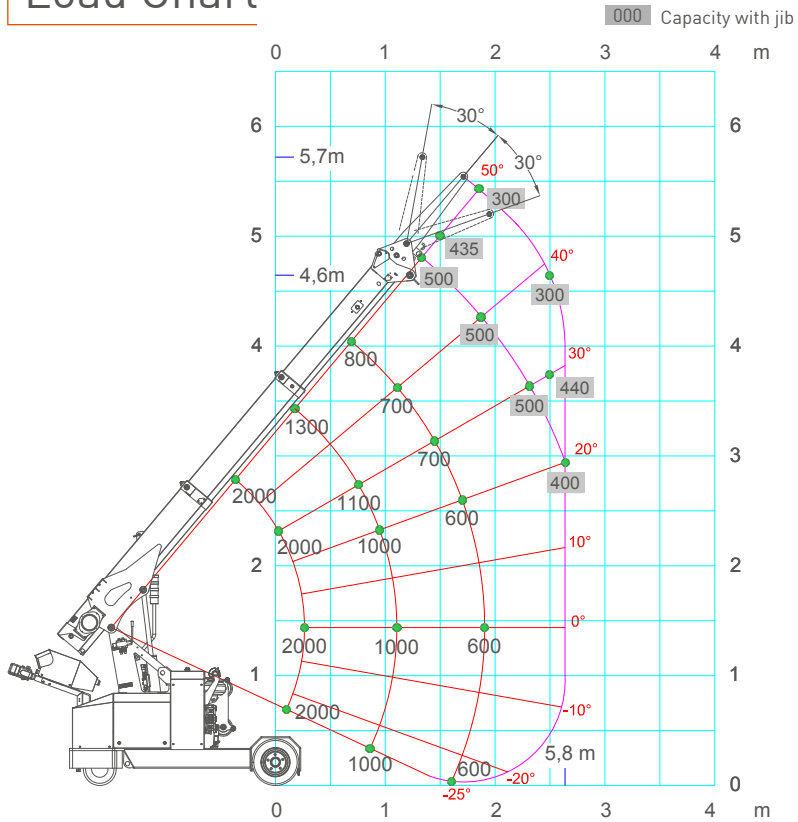

Dimensions

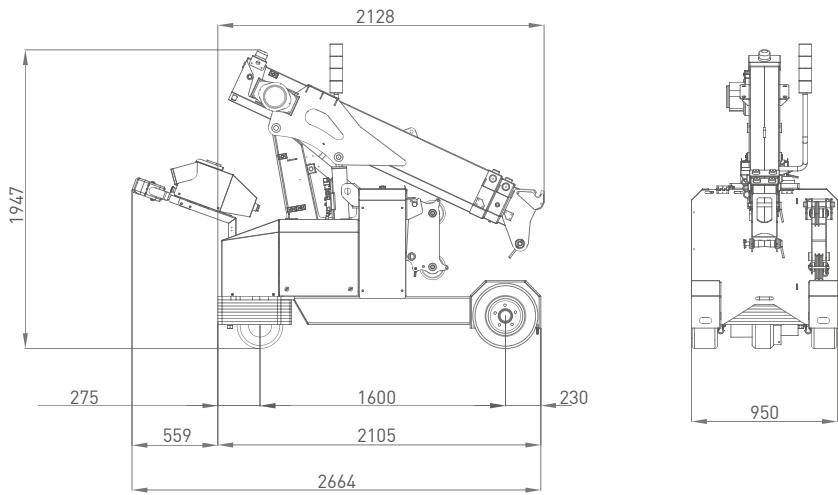

Tools Configurations

JIB500G		MR800	
	500 kg		800 kg
	300 kg @ 5.5 m		150 kg @ 4 m
	400 kg @ 2.5 m		150 kg @ 3.5 m



Crane Options

