





Technical Data

Specification & Capacities



MPK10

OVERALL DIMENSIONS

MPK10

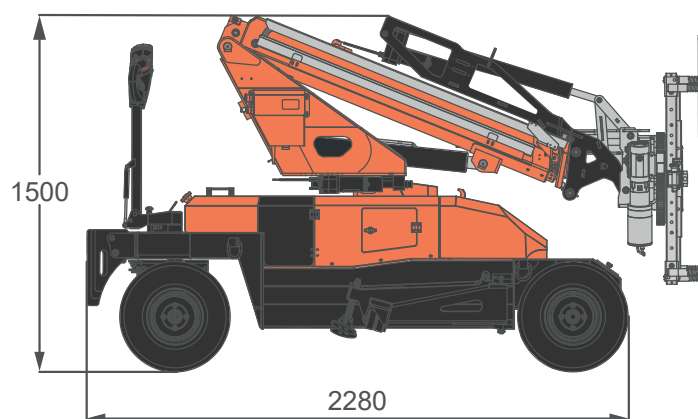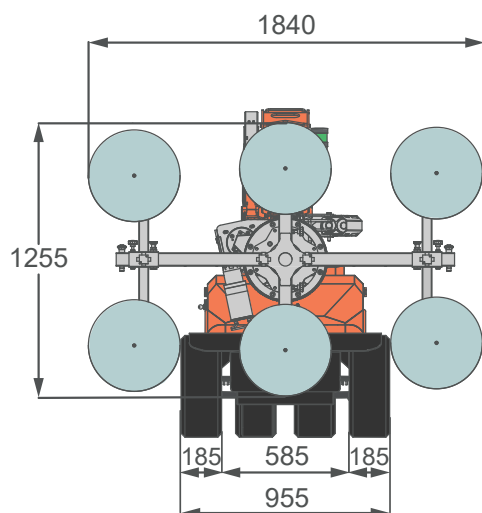


OUTDOOR WHEELS

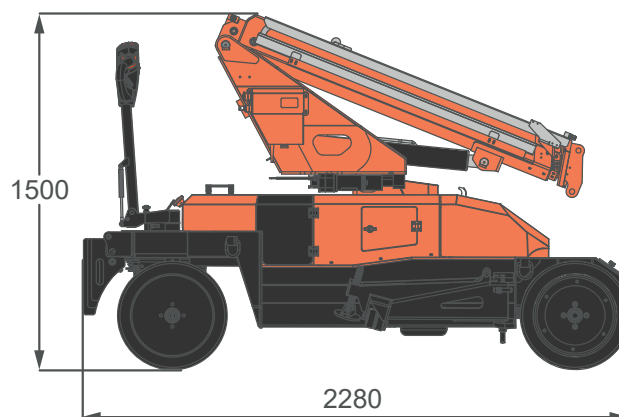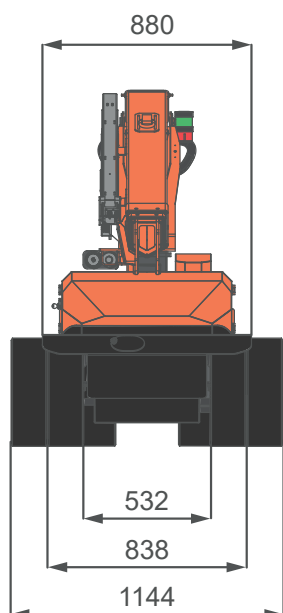


TWIN WHEELS

OVERALL DIMENSIONS

MPK10 OUTRIGGERS

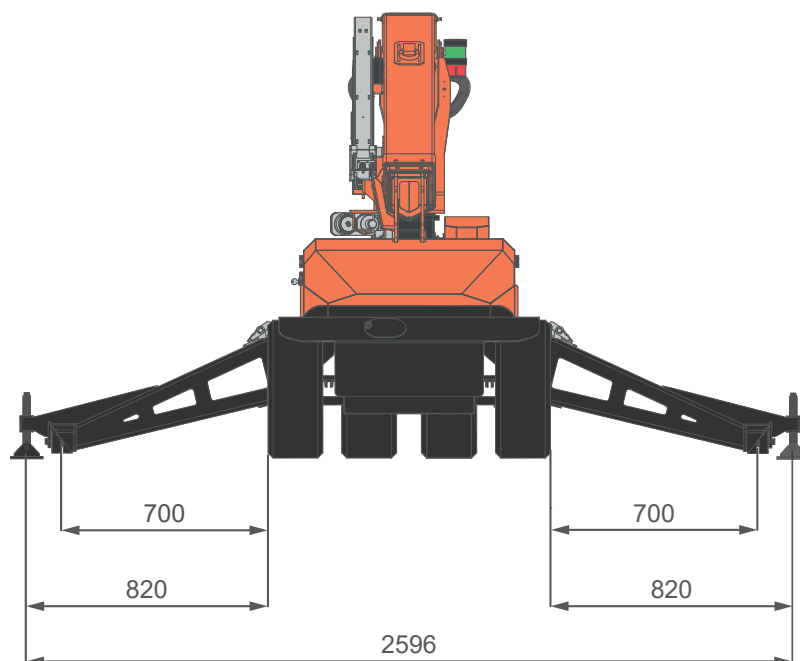

BOOM SWING

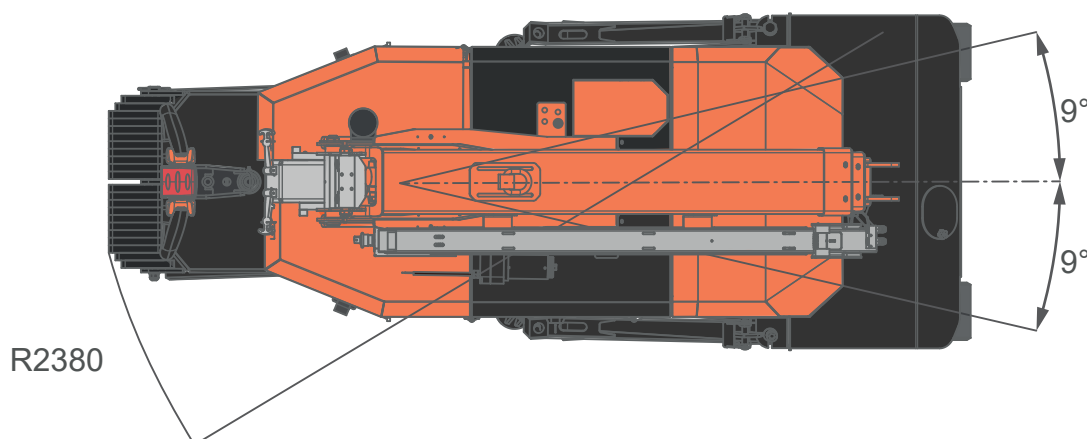

OVERALL INFORMATIONS

CRANE INFO	NAME		DESCRIPTION	U.M	VALUE
		OVERALL DIMENSIONS	Height	mm	1.500
			Length		2.280
			Width		955
		BOOM	Length	m	1,57 - 3,5
			Speed	s	48
		SLEWING	Angle	°	-9°/9°
			Speed	s	7
		LIFTING	Working Angle	°	-21°/58°
			Speed	s	42*
			Max Capacity	kg	990
			Back Wheel Max Load	kg	410
			Front Wheel Max Load		1.200
			Travel Speed	km/h	4
			Gradeability*	°	13
			Working Temperature	°C	-20°/+40°
			Lifting Class (UNI 4301-1)	A1	

WEIGHTS		CRANE	Total	kg	1.045
		COUNTERWEIGHT	CW1 (into frame)	kg	100
			CW2 (into hood)	kg	130


ACCESSORIES		JIB	JIB MPK10	kg	18
		GLASS MANIPULATOR	JVM10EV	kg	165
			JVM06EV	kg	110

ENGINE		ELECTRIC	Voltage	V	24
			Power	kW	2,2


*: Max value only for short distance and a maximum of 30 seconds. Forward movement at maximum gradeability is intended with extended boom and without load

MPK10 - MAIN BOOM

with HOOK

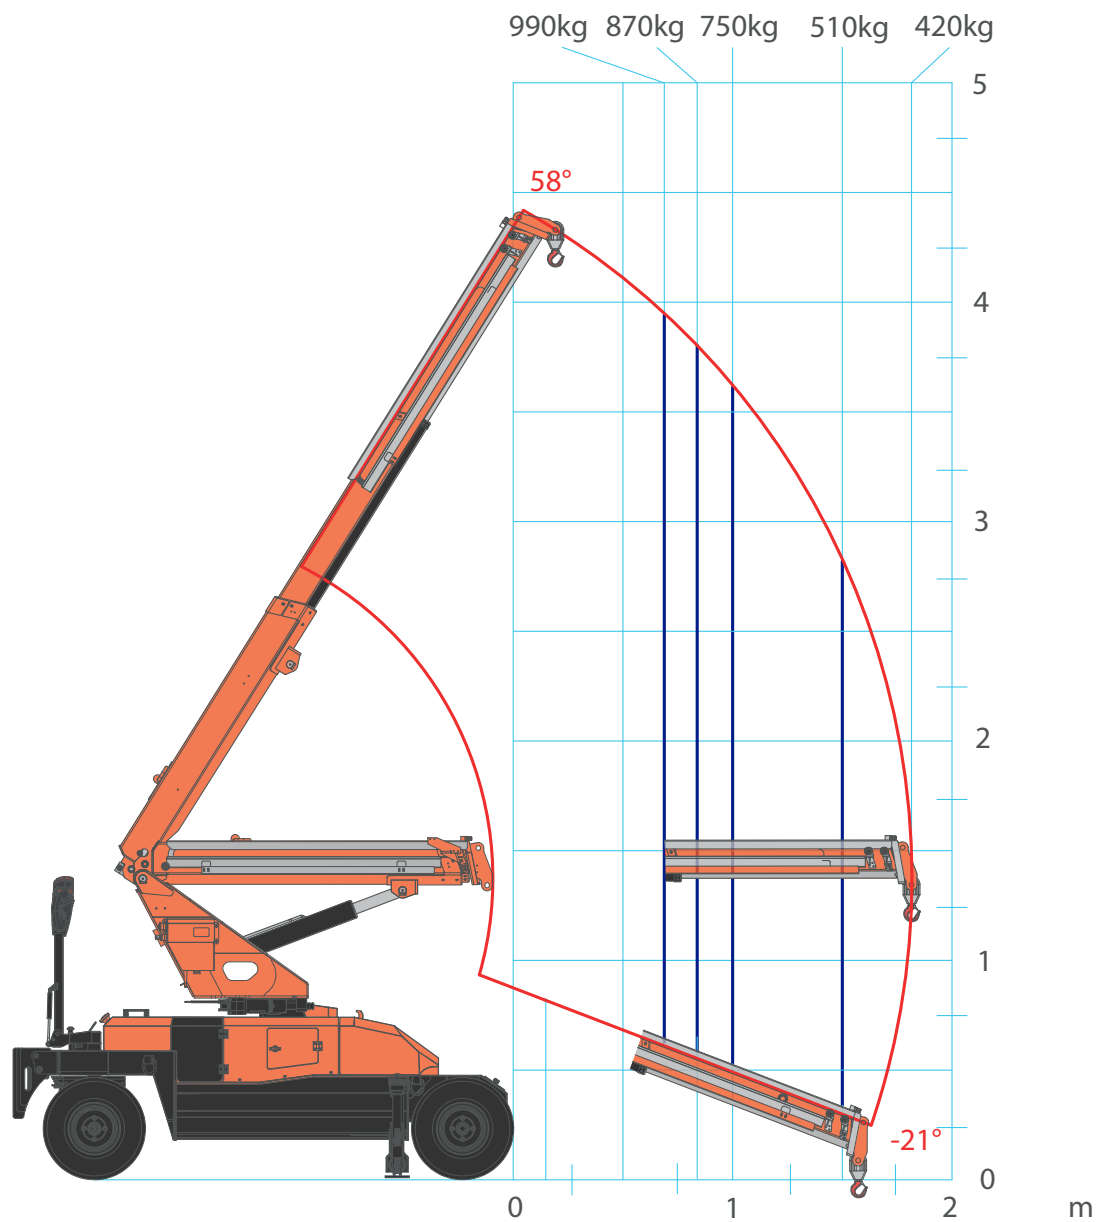


MPK10 - JVM10EV

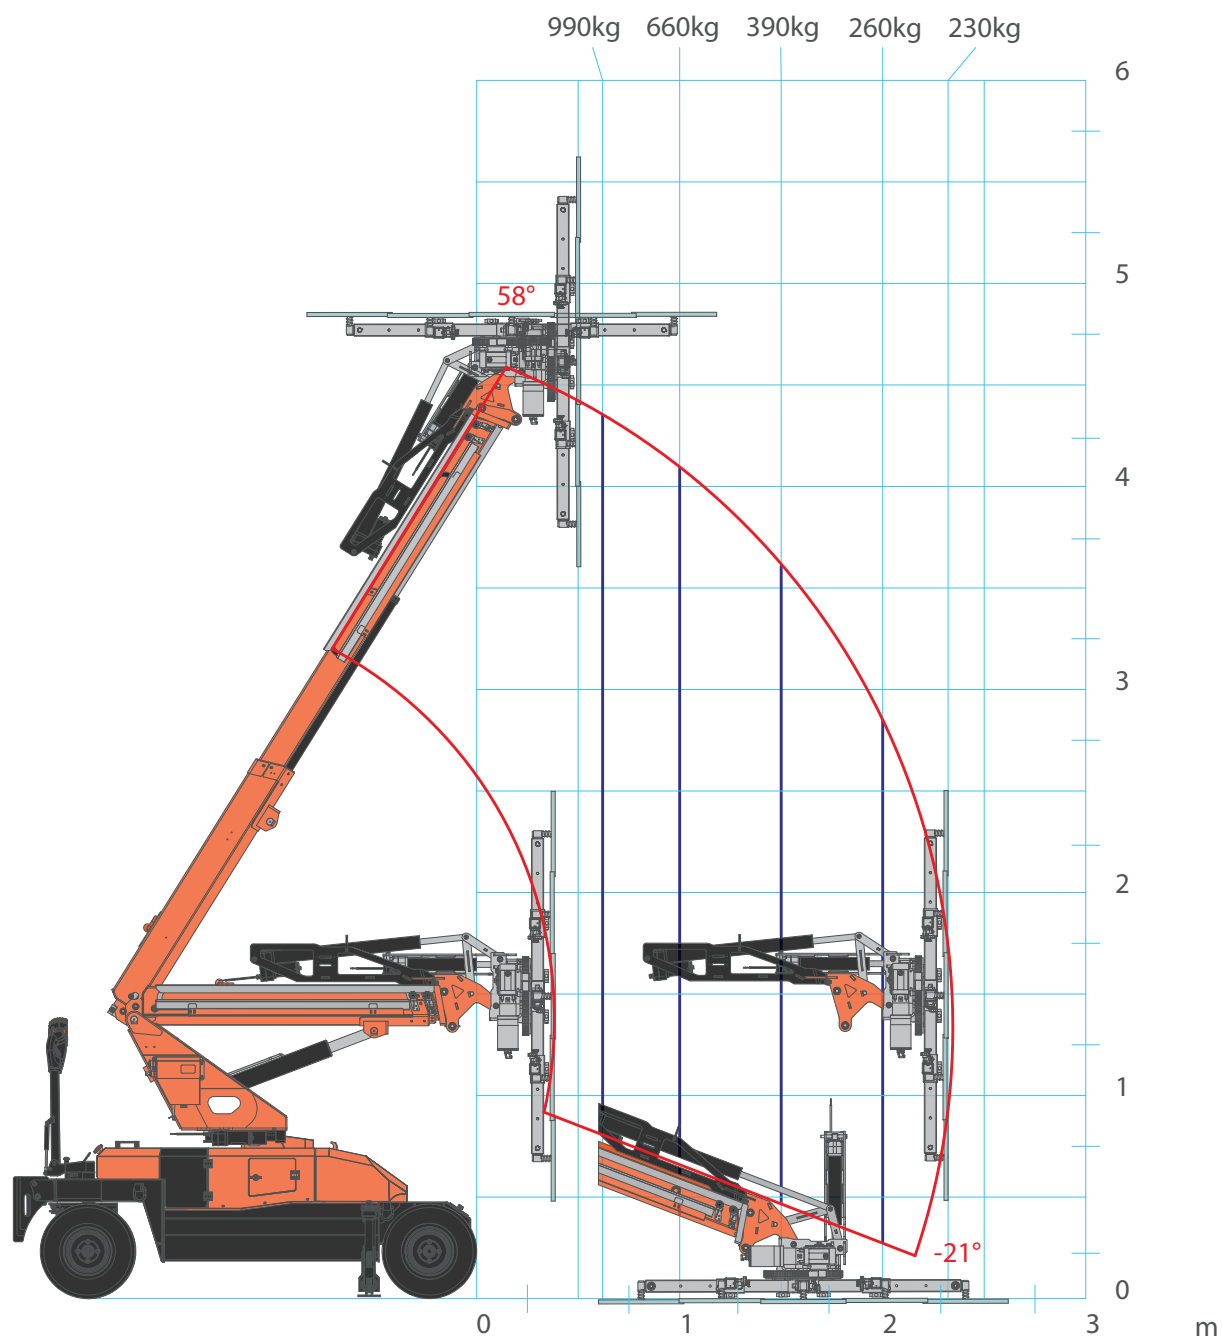


MPK10 - JIBMPK10

with HOOK

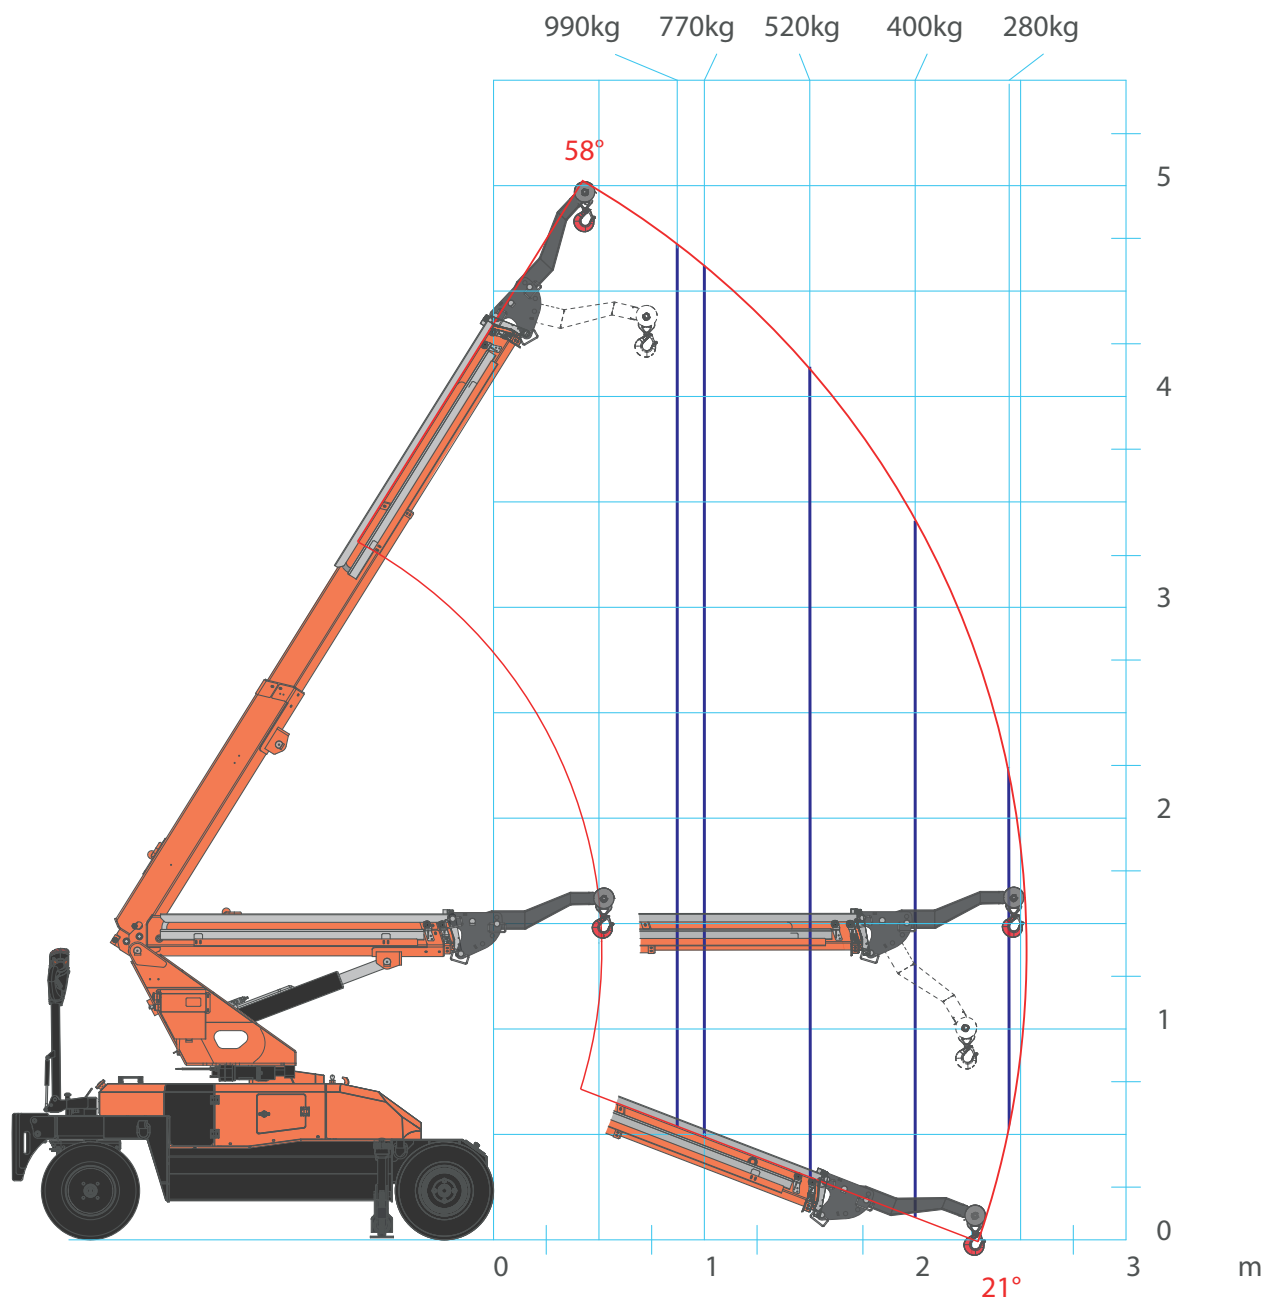


ACCESSORIES FEATURES


JVM10EV

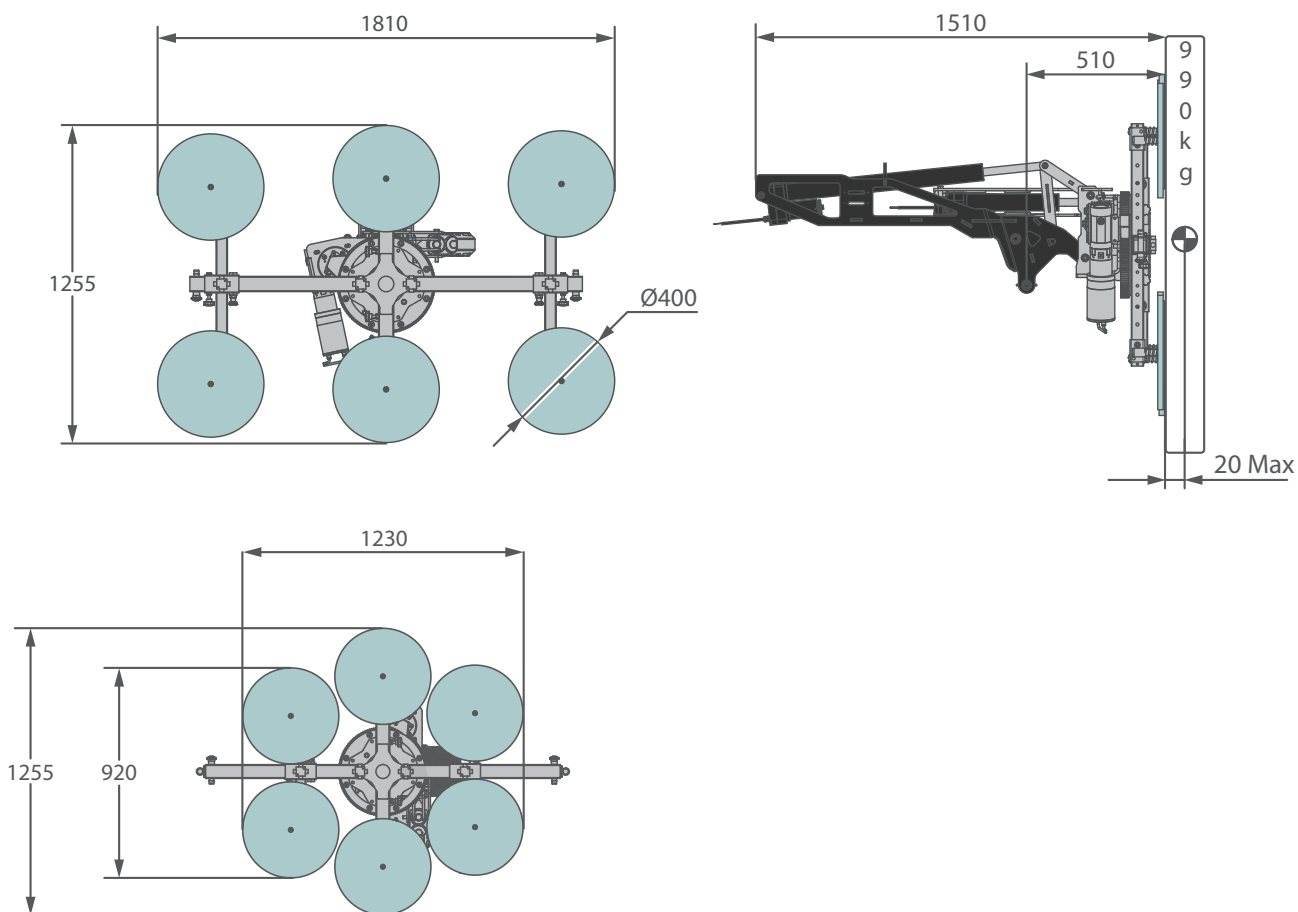

TILT

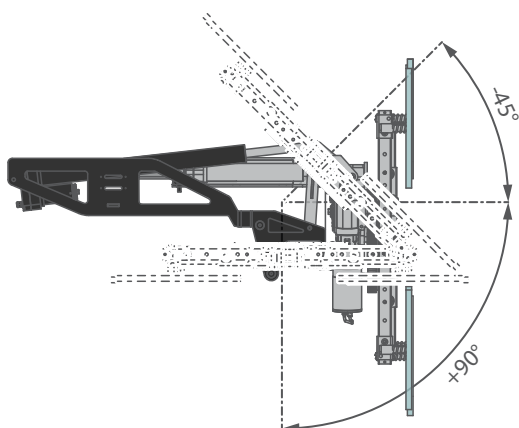




SWING

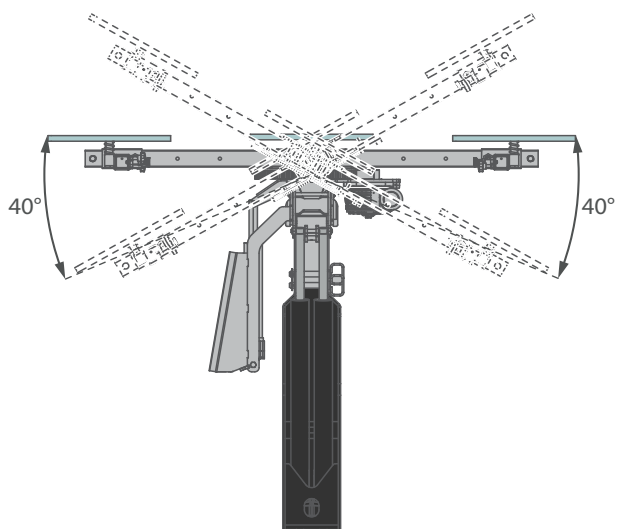


[mm]

ACCESSORIES FEATURES


JVM06EV

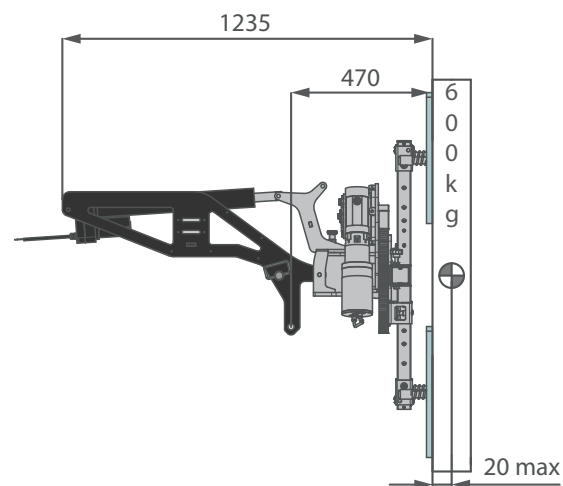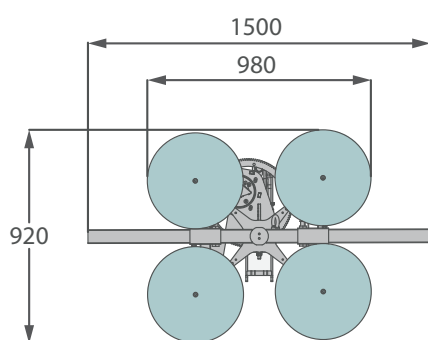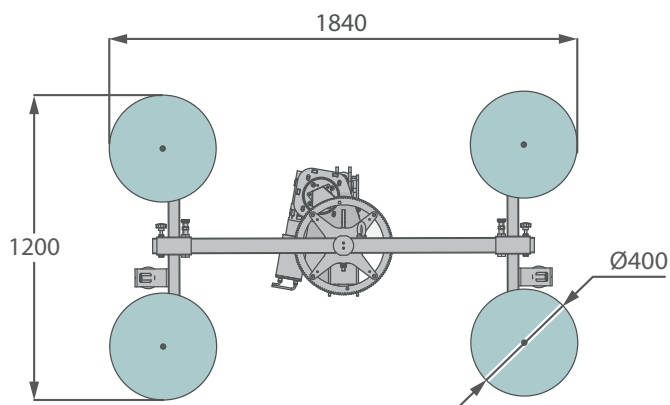

TILT

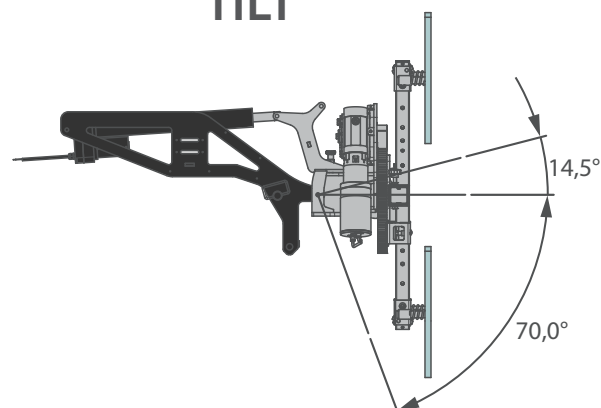


SWING

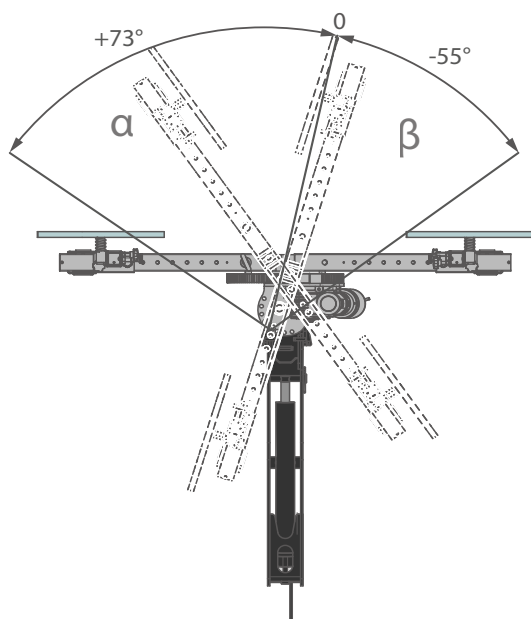

α	
+73°	5 POSIZIONI OGNI 18,3°
β	
-55°	4 POSIZIONI OGNI 18,3°

ACCESSORIES FEATURES

JIB MPK10

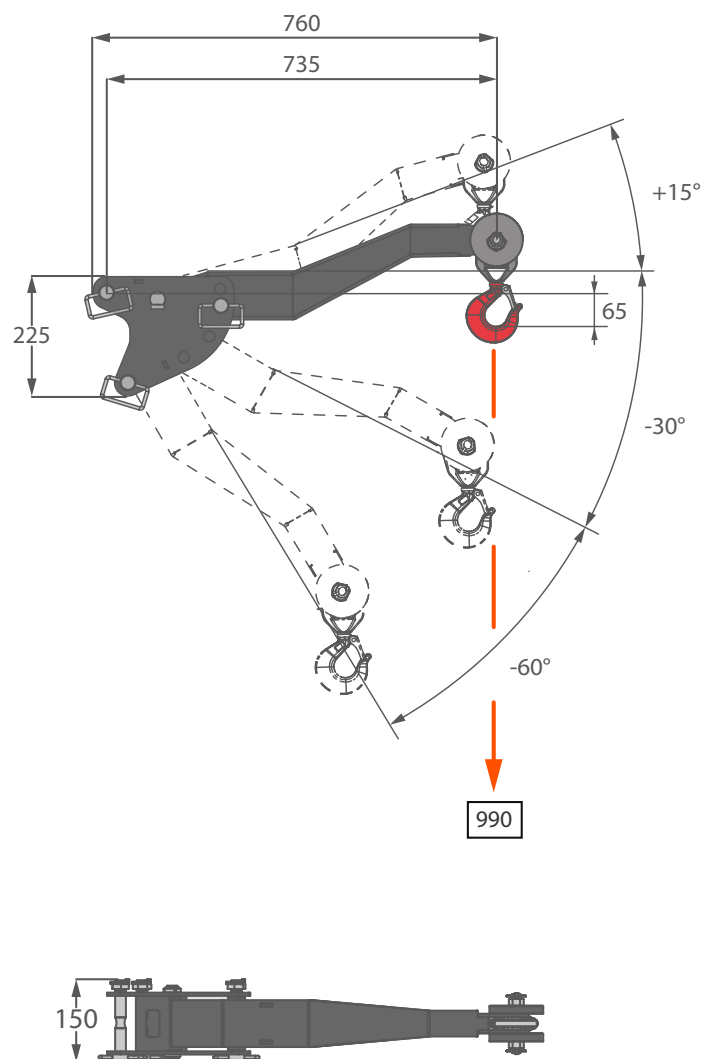


	JIB	JIB-MPK10	kg	20
---	-----	-----------	----	----

ACCESSORIES

MPK10

ATTACHMENTS & TOOLS

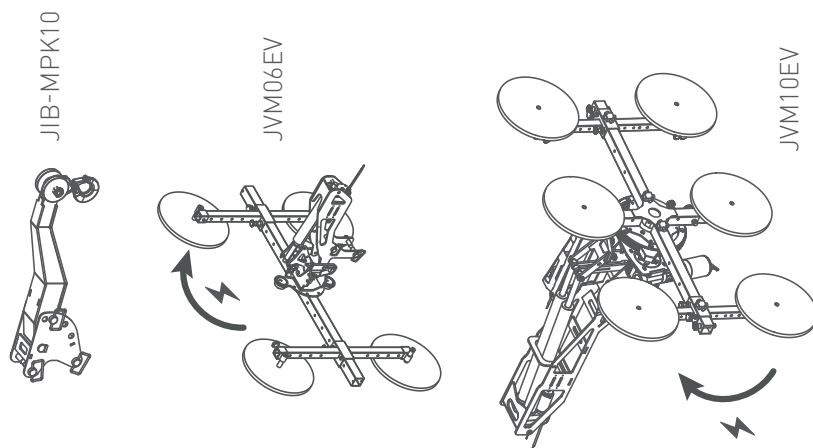

BATTERY CHARGERS



RC-MPK10




HOOK-MPK-JR



WT-MPK10



WT-MPK10-XL

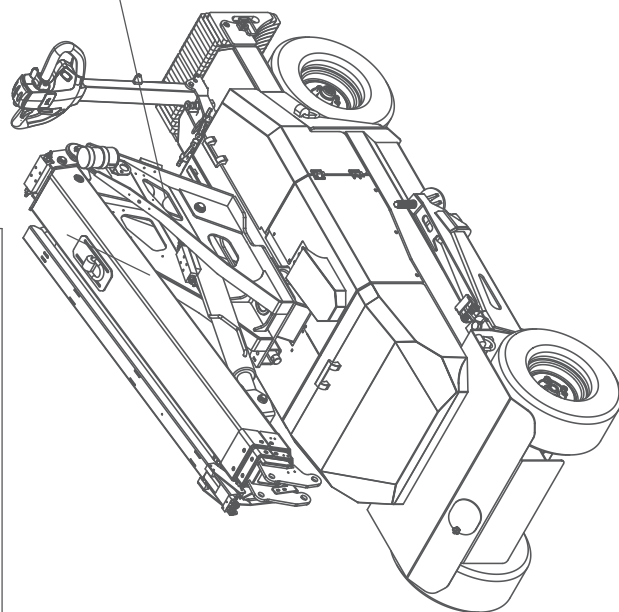

CRANE COLOR

Boom & Covers
Chassis, Frames

STANDARD

☒ RAL2004
☒ RAL7021

PC03

☐ RAL
☒ RAL7021



SYMBOLS


	Minipicker		Electric Engine		Boom Angle		Weight
	Travel Speed		Maximum Capacity		Boom Length		Back Wheel Loading Point
	Gradeability		Slewing		Jib		Front Wheel Loading Point
	Glass Manipulator		Working Temperature				

REMARKS REFERRING TO LOAD CHART

- Load charts are calculated according to EN 13000.
- For the calculation of the load charts at least a wind speed of 9m/s (33km/h) and regarding the load a sail area of 1m² per ton load and a wind resistance coefficient of 1.2 on the load have been taken into account. For lifting of loads with large sail areas and/or high wind resistance coefficients the maximum wind speed as stated in the load charts has to be reduced.
- Lifting capacities are given in kilograms.
- The weight of the hook blocks and hooks is part of the load and therefore it must be deducted from the lifting capacities.
- Working radii are measured from the slewing centre.
- The lifting capacities given for the telescopic boom apply if the folding jib is removed.
- Subject to modification of lifting capacities.

**YOUR
JEKKO
DEALER**

EN All specifications and features herein described can be changed without prior advice. All indicated data are indicative only and are not binding as crane performs differently depending on its use. **IT** Tutte le caratteristiche e le specifiche descritte possono essere soggette a variazioni senza preavviso. Tutti i dati riportati sono forniti a puro titolo informativo e non sono impegnativi dal momento che le prestazioni della macchina variano in funzione dell'utilizzo. **DE** Unangekündigte Änderungen sämtlicher Eigenschaften und Daten sind möglich. Alle Angaben sind Richtwerte und nicht verbindlich da die Leistungen der Vorrichtung von deren Einsatz abhängen. **ES** Todas las características y las especificaciones aquí indicadas pueden ser sujetas a variaciones sin aviso. Se dan todos los datos aquí indicados como simples informaciones. No se consideran como vinculantes, dado que las prestaciones del maquinario pueden variar. **FR** Toutes les caractéristiques et le spécifications descriptives peut être sujet à variation sans préavis. Tout les données rapportés sont fourni à titre informatif et ne sont pas engager au moment que la prestation de la machine varie en fonction de l'emploi.

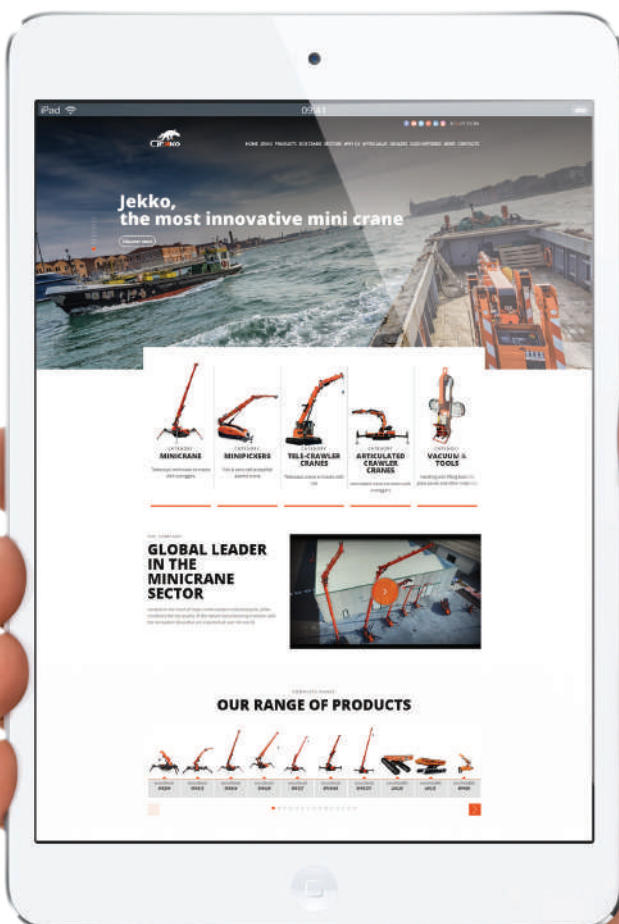

www.jekko-cranes.com

Visit **jekko-cranes.com** to keep in contact with us, discover all the latest news and find out technical details of all our products.

11.04.2022 | Rev.7

SERIAL NUMBER:



Jekko s.r.l.

Via Campardone, 1 - 31014 Colle Umberto (TV) - Italy
info@jekko.it - www.jekko-cranes.com